




Performance curves

FS Series FS651V

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

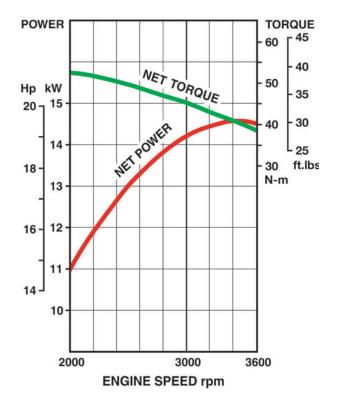

Туре

- 4 Stroke
- Air Cooled
- V Twin
- Overhead valve
- Vertical Shaft

Technical Specifications

 Engine Type 	4-Stroke, Vertical Shaft, V-Twin, OHV, Air-cooled
 Number of cylinders 	2
 Bore x stroke 	78 x 76 mm
 Displacement 	726cm ³
 Max. power 	14.5 kW (19.4 hp) / 3600 rpm
 Max. torque 	52.5 Nm (38.7 ft.lbs) / 2000 rpm
 Fuel tank capacity 	
 Oil capacity 	2.2 litres
 Dry weight 	41.0 Kg
 Dimensions (L x W x H) (mm) 	500 x 465 x 391



Features

- 90 degree V-twin
- Automatic compression release
- Bendix type starter
- Cast iron cylinder liners
- Clean out ports*
- Dual element air filter

- Electronic spark ignition
- High performance lubrication system
- Internally vented carburetor with fuel shut-off solenoid
- Overhead V-valves
- Rotating grass screen
- Spherical combustion chambers

Options

- Muffler
- Oil pressure switches
- Shaft variations

- 20 Amp charge coil
- Various oil drains
- Various speed control system



FS Series FS651V

