




## **Type**

- 4 Stroke
- Air Cooled
- V Twin
- Overhead valve
- Vertical Shaft

### **Performance curves**

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

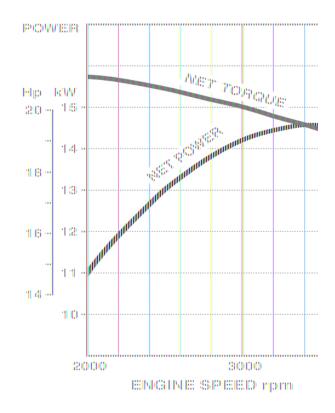

#### **Technical Specifications**

■ Engine Type	4-Stroke, Vertical Shaft, V-Twin, OHV, Air-cooled
■ Max. power	14.5 kW (19.4 hp) / 3600 rpm
Oil capacity	2.2 litres
<ul><li>Number of cylinders</li></ul>	2
<ul><li>Displacement</li></ul>	726cm³
■ Dimensions (L x W x H) (mm)	500 x 465 x 391
■ Bore x stroke	78 x 76 mm
■ Fuel tank capacity	
Max. torque	52.5 Nm (38.7 ft.lbs) / 2000 rpm
■ Dry weight	41.0 Kg



#### **Features**

- Bendix type starter
- Dual element air filter
- High performance lubrication system
- Cast iron cylinder liners
- Internally vented carburetor with fuel shut-off solenoid
- Automatic compression release

- Clean out ports\*
- 90 degree V-twin
- Electronic spark ignition
- Spherical combustion chambers
- Overhead V-valves
- Rotating grass screen

# **Options**

- Shaft variations
- Various speed control system
- 20 Amp charge coil

- Various oil drains
- Oil pressure switches
- Muffler



