




Type

- 4 Stroke
- Air Cooled
- V Twin
- Overhead valve
- Vertical Shaft

Performance curves

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

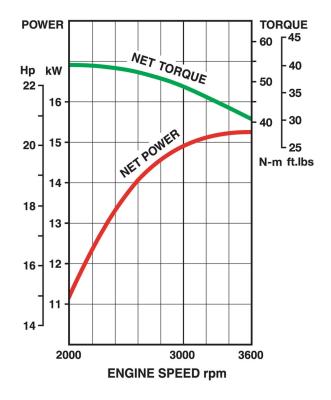

Technical Specifications

■ Engine Type	4-Stroke, Vertical Shaft, V-Twin, OHV, Air-cooled
■ Max. power	15.4 kW (20.6 hp) / 3600 rpm
Oil capacity	2.2 litres
Number of cylinders	2
Displacement	726cm³
Dimensions (L x W x H) (mm)	500 x 465 x 391
Bore x stroke	78 x 76 mm
Fuel tank capacity	
Max. torque	53.3 Nm (39.3 ft.lbs) / 2000 rpm
Dry weight	41.0 Kg



Features

- Bendix type starter
- Dual element air filter
- High performance lubrication system
- Cast iron cylinder liners
- Internally vented carburetor with fuel shut-off solenoid
- Automatic compression release

- Clean out ports*
- 90 degree V-twin
- Electronic spark ignition
- Spherical combustion chambers
- Overhead V-valves
- Rotating grass screen

Options

- Shaft variations
- Various speed control system
- 20 Amp charge coil

- Various oil drains
- Oil pressure switches
- Muffler



