




Туре

- 4 Stroke
- Air Cooled
- V Twin
- Overhead valve
- Vertical Shaft

FS Series FS730V

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

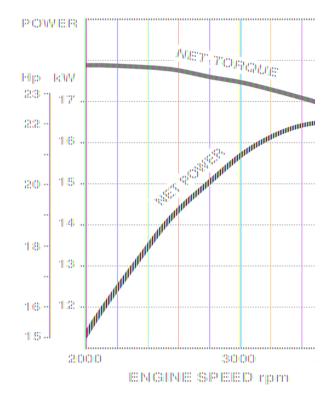

Technical Specifications

 Engine Type 	4-Stroke, Vertical Shaft, V-Twin, OHV, Air-cooled
 Max. power 	16.5 kW (22.1 hp) / 3600 rpm
 Oil capacity 	2.2 litres
 Number of cylinders 	2
 Displacement 	726cm ³
 Dimensions (L x W x H) (mm) 	500 x 465 x 391
 Bore x stroke 	78 x 76 mm
 Fuel tank capacity 	
 Max. torque 	53.9 Nm (39.8 ft.lbs) / 2000 rpm
 Dry weight 	41.0 Kg



Features

- Bendix type starter
- Dual element air filter
- High performance lubrication system
- Cast iron cylinder liners
- Internally vented carburetor with fuel shut-off solenoid
- Automatic compression release

- Clean out ports*
- 90 degree V-twin
- Electronic spark ignition
- Spherical combustion chambers
- Overhead V-valves
- Rotating grass screen

Options

- Shaft variations
- Various speed control system
- 20 Amp charge coil

- Various oil drains
- Oil pressure switches
- Muffler



FS Series FS730V

