




FT Series FT730V Electronic Fuel Injection (EFI)

Performance curves

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

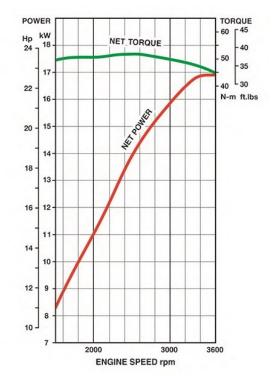

Туре

- 4 Stroke
- Air Cooled
- V Twin
- Overhead valve
- Vertical Shaft

Technical Specifications

 Engine Type 	4-Stroke, Vertical Shaft, V-Twin, OHV, Air-cooled
 Max. power 	16.9 kW (22.6 hp) 3600 rpm
 Oil capacity 	2.2
 Number of cylinders 	2
 Displacement 	726 cm ³
 Dimensions (L x W x H) (mm) 	517 x 497 x 418
 Bore x stroke 	78 x 76 mm
 Fuel tank capacity 	
 Max. torque 	51.8 Nm (38.2 ft. lbs) 2600 rpm
 Dry weight 	48.5 kg



Features

- Sequential multiport fuel injection
- High pressure fuel injection technology with electronic fuel pump
- Large, easy access ports
- 30 Amp charge coil
- Electronic altitude compensation
- Cast iron cylinder liners
- Proven open loop design

- Compact electronic control unit
- Integrated electronic throttle control unit
- Electronic ignition with variable spark timing
- 90 degree V-twin
- Pressurised lubrication system
- Heavy duty shift type starter
- High-efficiency, centrifugal air intake system

Options

- Shaft variations
- Various oil drains

- Oil pressure switches
- Muffler



FT Series FT730V EFI

