




Туре

- 4 Stroke
- Air Cooled
- V Twin
- Overhead valve
- Vertical Shaft

FX Series FX541V

Performance curves

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349.Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

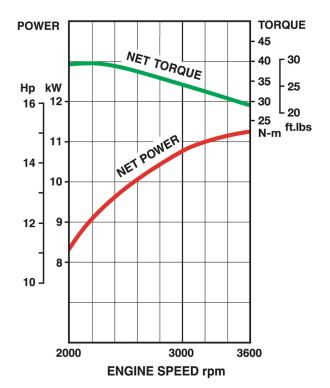

Technical Specifications

 Engine Type 	4-Stroke, Vertical Shaft, V-Twin, OHV, Air-cooled,
 Max. power 	11.4 kW (15.3 hp) / 3600 rpm
Oil capacity	2.0 litres
 Number of cylinders 	2
 Displacement 	603cm ³
 Dimensions (L x W x H) (mm) 	468 x 429 x 544
 Bore x stroke 	73 x 72 mm
 Fuel tank capacity 	
 Max. torque 	39.1 Nm (28.8 ft.lbs) / 2200 rpm
 Dry weight 	40.7 Kg



Features

- Single stage canister air filter
- High performance lubrication system
- Cast iron cylinder liners
- Internally vented carburetor with fuel shut-off solenoid
- Automatic compression release
- Metal engine cover
- 90 degree V-twin

- Electronic spark ignition
- Spherical combustion chambers
- Clean out ports
- Heavy duty shift type starter
- Overhead V-valves
- Rotating grass screen

Options

- Shaft variations
- Various speed control system
- 20 Amp charge coil

- Various oil drains
- Oil pressure switches
- Muffler



FX Series FX541V

